


General Arrangement Drawing Twin Pump Dry Well Station

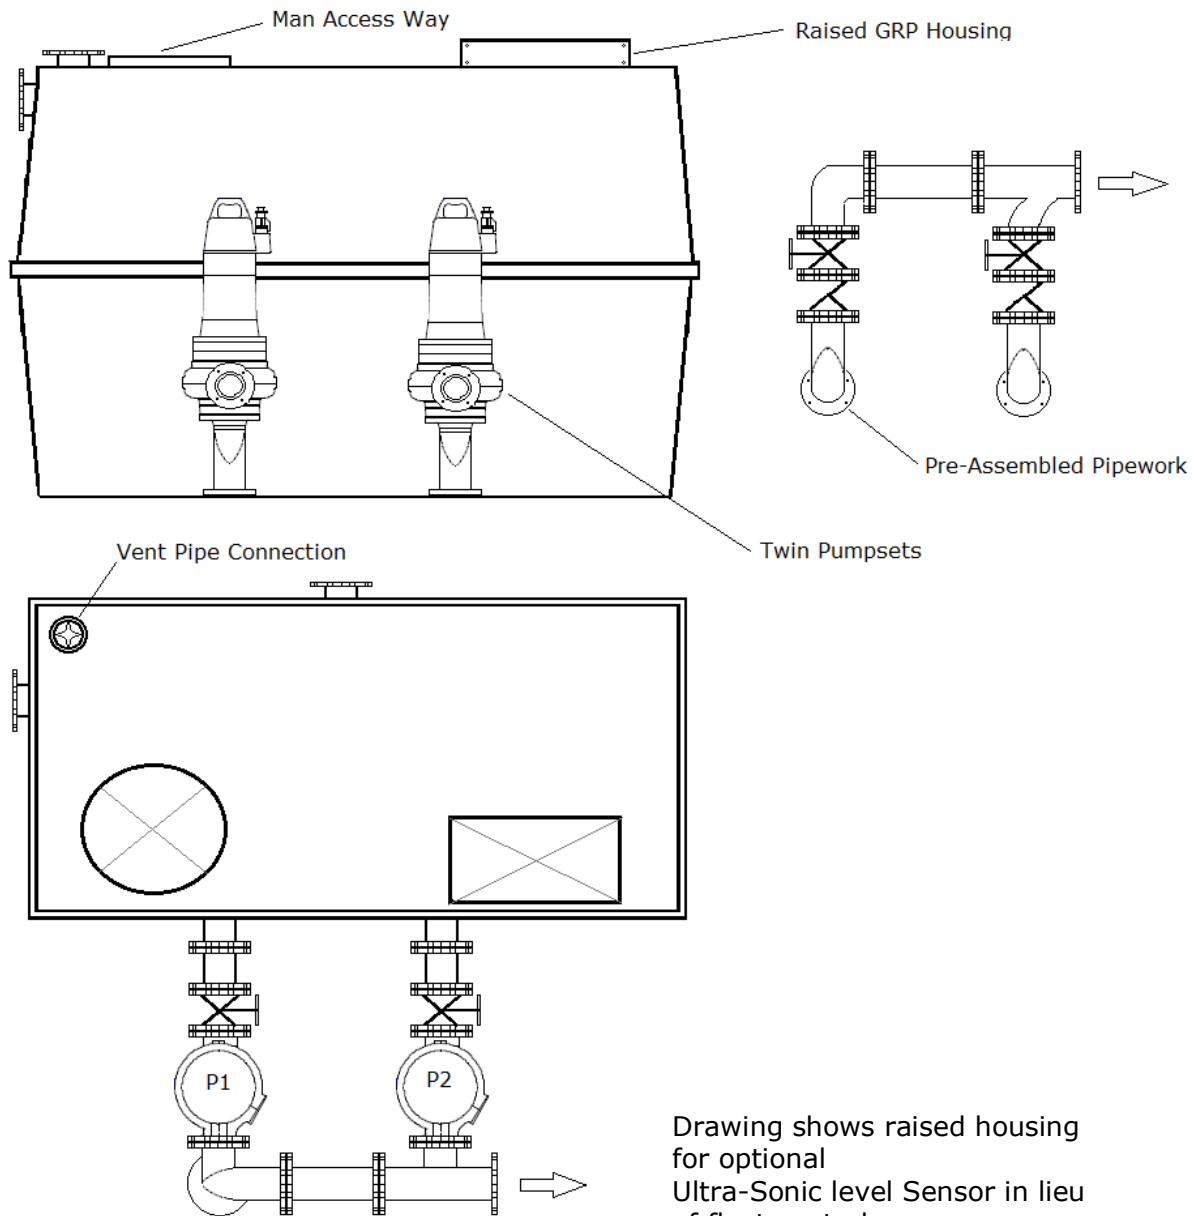

Drawing shows raised housing for optional Ultra-Sonic level Sensor in lieu of float controls.

Tank consists of:

Optional 25mm insulation to sides and lid
 1 x DN100/150 inlet flanged spigot
 1 x DN80/100 vent flanged spigot
 2 x DN80/DN100 flanged spigots (pumps)
 600mm diameter man access way
 Optional – Internal / external ladders
 Connections can be positioned on tank to suit any application.

Ductile Iron or uPVC Pipework Kit comprising:

2 x 200mm double flanged pipe (Suction side)
 2 x Gate Valves
 2 x short radius elbows
 2 x Non-Return Valves
 2 x Gate Valves
 1 x long radius elbow
 1 x 300mm double flanged pipe
 1 x Swept tee.