



WEATHERPROOF KIOSK – GENERAL ARRANGEMENT DETAILS

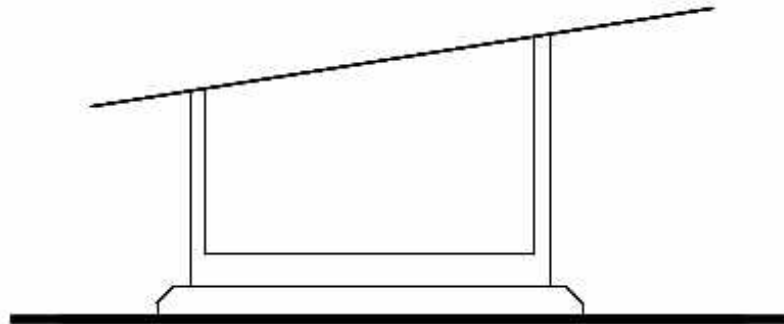

Front Elevation

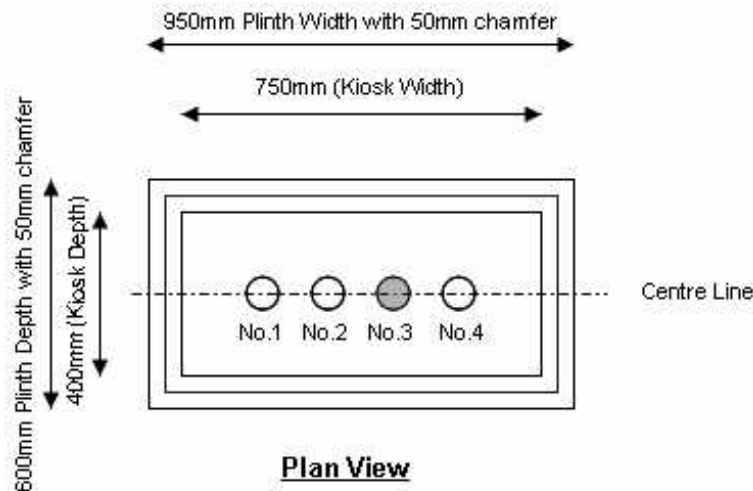

Plan View

Plinth Details

Kiosk plinth to be 100mm larger all round than kiosk footprint with 50mm chamfer to all edges and to stand 100mm above ground level to prevent surface water ingress

Kiosk dimensions (without electricity meter) 1250mmHx750mmWx400mmD

Control Panel dimensions 500mmHx400mmWx200mmD with cable entry in base of panel (control panel height will be 600mm if fitted with optional integral telemetry unit)

All cable ducts to be 100mm diameter, installed with draw wires and laid straight between kiosk location and wet well

On completion of works all cable ducts to be sealed within the kiosk and the kiosk to be sealed at junction with concrete plinth by Rapid Pumps

Cable Duct Code

No.1 Pump power cables out to wet well

No.2 Level control floats out to wet well

No.3 B.T. line in to control panel if optional telemetry unit fitted

No.4 Power supply in to panel

(Duct No.s 1&2 can be combined for short cable runs)

WEATHERPROOF KIOSK GENERAL ARRANGEMENT
Drg No. : Std Kiosk Plinth Details NOT TO SCALE